


Xtratone Conventional Wall Sounder (ZXT/R & ZXT/W)

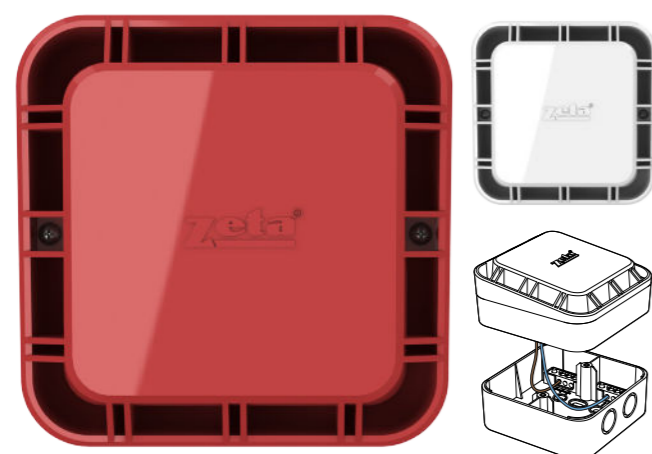


Description

The new Xtratone conventional sounder is designed to meet EN54 part 3 with a selection of 22 tones. It is available in red or white with termination of field wiring made to the backbox for a clean first fix.

Features

- ✓ Complies with EN54 Part 3 Type A
- ✓ 102dB @ 1m sound output
- ✓ 22 Tone patterns (site selectable)
- ✓ Flush or surface fixing
- ✓ Housed in UL V0 flame retardant ABS
- ✓ 4 x 20mm cable entries (2 top, 2 bottom)
- ✓ First fix, wire to back box technology

Dimensions & Weight

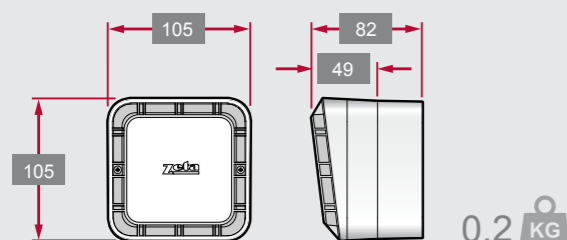


Technical Specification


Model	ZXT/R	ZXT/W
Part No.	42-606	42-607
Designed to	EN54 Part 3	EN54 Part 3
Voltage	17 - 30V DC	17 - 30V DC
Current @ 24V DC	10mA	10mA
Body Colour	Red	White
Sounder Type	A	A
IP Rating	IP 21 C	IP 21 C
Operating Temperature	-10°C to 55°C	-10°C to 55°C
Sound Output @ 1m	*102dB	*102dB +/- 2dB
Size mm (with back box)	105 x 105 x 49 (105 x 105 x 82)	
Weight	200g	200g

* This applies to 'TONE 0' 800Hz and 970Hz, 500ms each

First Fix

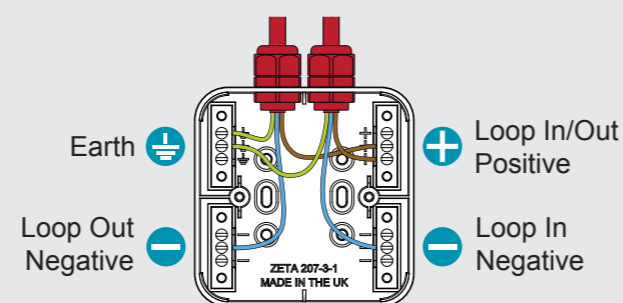

Xtratone Conventional Combined Wall Sounder Beacon (ZXTB/R & ZXTB/W)

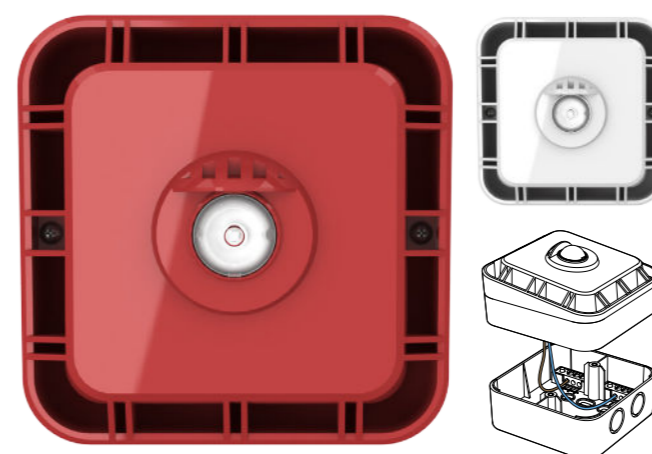


Description

The new Xtratone conventional wall sounder with beacon has been designed to make an "electronics free" first fix and is available in red or white. The beacon has a coverage pattern of W 3.0 - 8.9 and the sounder part has 22 selective tones.

Features

- ✓ Complies with EN54 Pt 3 Type A & EN54 Pt 23
- ✓ 102dB @ 1m sound output
- ✓ 22 Tone patterns (site selectable)
- ✓ Flush or surface fixing
- ✓ Housed in UL V0 flame retardant ABS
- ✓ 4 x 20mm cable entries (2 top, 2 bottom)
- ✓ First fix, wire to back box technology
- ✓ Flashing Rate 0.5Hz

Dimensions & Weight

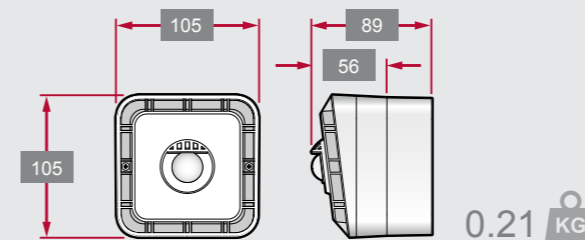

Technical Specification

Model	ZXTB/R	ZXTB/W
Part No.	42-608	42-609
Voltage	17 - 30V DC	17 - 30V DC
Current @ 24V DC	70mA Max	70mA Max
Flash Colour	White	White
Flash Frequency	0.5Hz	0.5Hz
Body Colour	Red	White
Sounder Type	A	A
IP Rating	IP 21 C	IP 21 C
Operating Temperature	-10°C to 55°C	-10°C to 55°C
Sound Output @ 1m	*102dB	*102dB
Size mm (with back box)	105 x 105 x 56 (105 x 105 x 89)	
Weight	210g	210g

* This applies to 'TONE 0' 800Hz and 970Hz, 500ms each

Coverage

